

**INDUSTRIAL METAL
SUPPLY COMPANY**

metal made easy

Corrugated Profile Panels

for Cladding, Roofing & Architectural Design

STORE LOCATIONS

IRVINE
949-250-3343

SAN DIEGO
858-277-8200

RIVERSIDE
951-300-9900

SUN VALLEY
818-729-3333

PHOENIX
602-454-1500

TUCSON
520-441-5161

www.industrialmetalsupply.com

IMS is a distributor of Riverside Corrugating products

CORRUGATED PANELS, CUSTOM TRIM & ACCESSORIES

We stock a wide range of easy to install metal building products. Our inventory includes a variety of six different metal panel profiles. Custom matching trim and flashings are available up to 21 feet long.

Our metal panel profiles include:

- * PBR
- * AG PANEL
- * B DECK
- * 1/2" CORRUGATED
- * 7/8" CORRUGATED
- * 7.2L PANEL



COLD ROLLED STEEL: IN-STOCK & READY TO SHIP




24 GAUGE

7/8" CORRUGATED PROFILE

*COLD ROLLED STEEL WILL RUST WHEN
EXPOSED TO THE ELEMENTS.

PBR


- Galvalume: 26 gauge
- 36" panel coverage, 1-1/4" rib height
- Exposed fastener panel
- Trapezoidal rib on 12" centers
- Applies over open framing or solid substrate
- 1:12 slope minimum

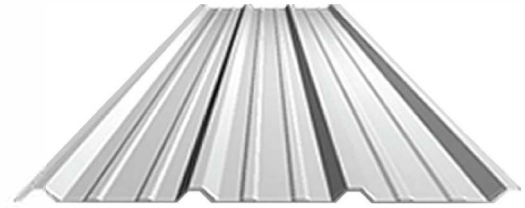

36" Coverage | 37" Panel Width

AG PANEL


- Galvalume: 29 gauge
- **White & Forest Green in stock:** 29 gauge
- 36" panel coverage, 3/4" rib height
- Exposed fastener low profile panel
- Bell Top rib on 9" centers
- Applies over open framing or solid substrate
- 3:12 slope minimum

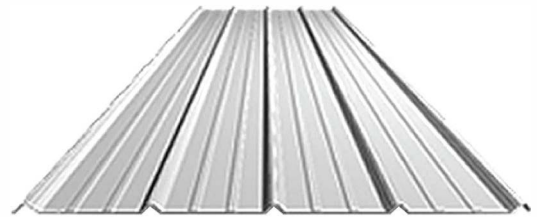

36" Coverage | 37" Panel Width

B DECK


- Galvanized: 20 & 22 gauge
- 1-1/2" rib height, 6" on center
- Common uses include trash enclosures, canopies, wall cladding, structural, decks
- * NOT a rated panel *

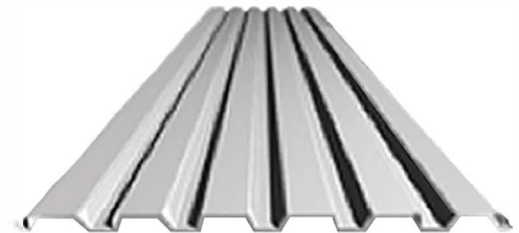

35" Coverage | 36" Panel Width

1/2" CORRUGATED


- Cold Rolled: 24 gauge
- Galvanized: 24, 26, 29 gauge
- Galvalume: 29 gauge
- 24" panel coverage, 1/2" rib height
- Exposed fastener panel
- Applies over open framing or solid substrate
- 3:12 slope minimum



24" Coverage | 26" Panel Width

7/8" CORRUGATED



- Cold Rolled: 24 gauge available in 37" coverage
- Galvalume: 26 gauge available in 37" & 32" coverage
- Exposed fastener panel
- Applies over open or solid substrate
- 3:12 slope minimum

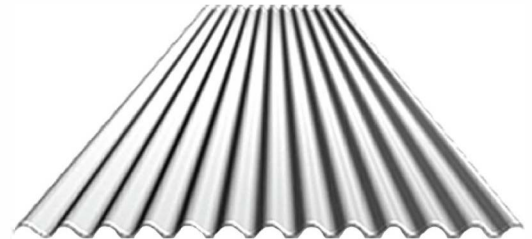

37" Coverage | 38" Panel Width


7.2L PANEL

- Galvalume: 26 gauge
- 1-1/2" rib height, 7.2" on center
- 36" wide coverage
- Exposed fastener panel
- Applies over open framing or solid substrate
- Structural type panel
- 3:12 minimum slope

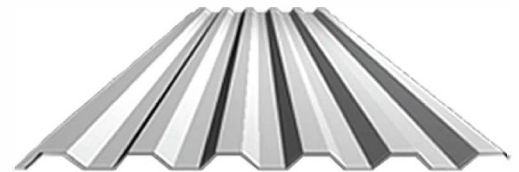


36" Coverage | 37" Panel Width

AVAILABLE TRIMS




DRIP EDGE




GABLE TRIM



RIDGE CAP



SIDEWALL

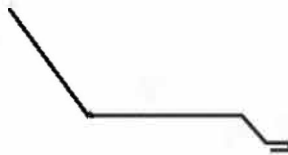


ENDWALL



**OUTSIDE
CORNER**




W-VALLEY 20"



**TRANSITION
FLASHING**






HIP CAP

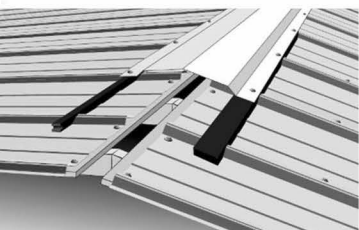

AVAILABLE UP TO 21 FEET LONG & 20 GAUGE MILD STEEL


FASTENER PLACEMENT

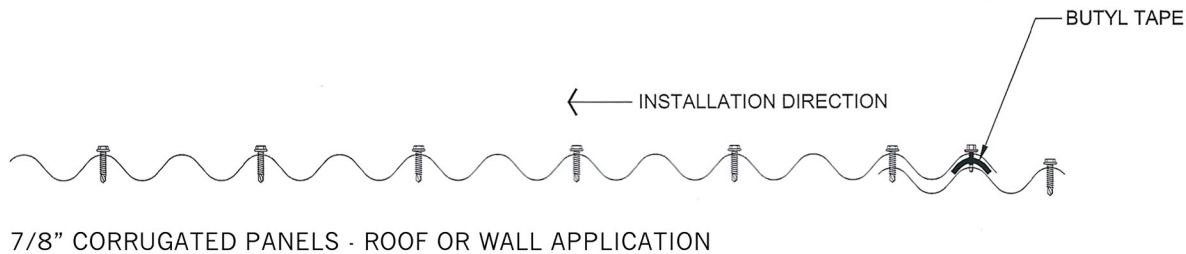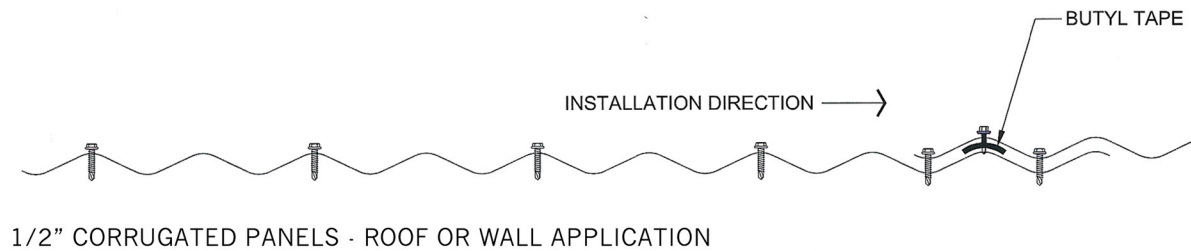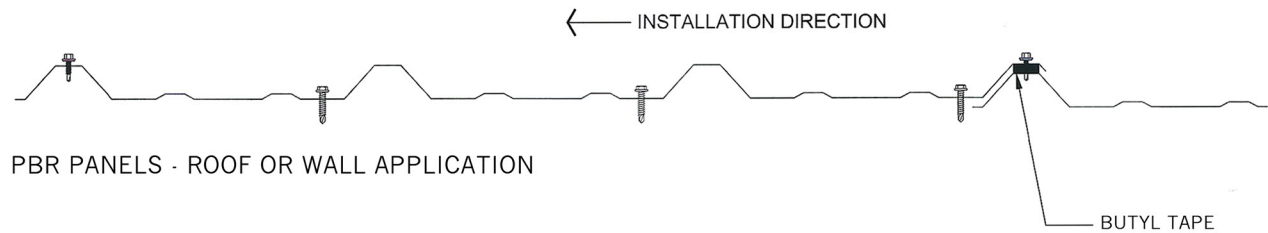

FASTENER SELECTION CHART



#9x1", 1 1/2", 2", 2 1/2", 3" WOOD SCREW 1/4" HEX HEAD



#14x7/8" LAP SELF DRILLER 5/16" HEX HEAD (COMPATIBLE WITH #14 WOOD SCREW)



#14x1", 1 1/2", WOOD SCREW 5/16" HEX HEAD



STST-42 STAINLESS STEEL RIVET 1/8 x 1/8



#12x3/4" STITCH SCREW 1/4" HEX HEAD (COMPATIBLE WITH #10 WOOD SCREW)



#12x1", 1 1/2", 2", 2 1/2" SELF DRILLER 5/16" HEX HEAD